


CONTENTES

Cast Bronze JIS Industrial valves

■ JIS 5K Industrial Globe Valves and Globe check Valve(Screw Bonnet)	JIS fig127	3
■ JIS 5K Industrial Gate Valves Non Rising Stem (Screw Bonnet)	JYV fig123	4
■ JIS 10K Globe Valves	JIS B206	5
■ JIS 10K Globe Screw-Down Check Valves	JIS B206	5
■ JIS 10K Angle Valves	JIS B207	6
■ JIS 10K Angle Screw-Down Check Valves	JIS B207	6

JYV

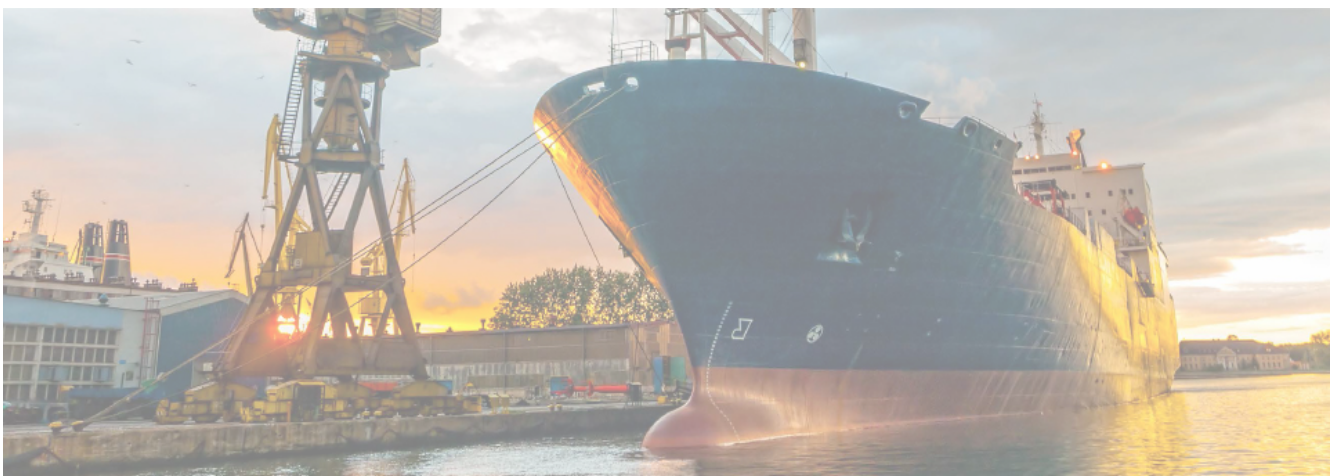

JIS MARINE VALVE JAPANESE INDUSTRIAL STANDARD




※ It's prohibited to copy or transcribe arbitrarily.


Cast Bronze JIS Industrial Valves

■ JIS 5K Industrial Globe Valves and Globe check Valve(Screw Bonnet)

JIS fig127

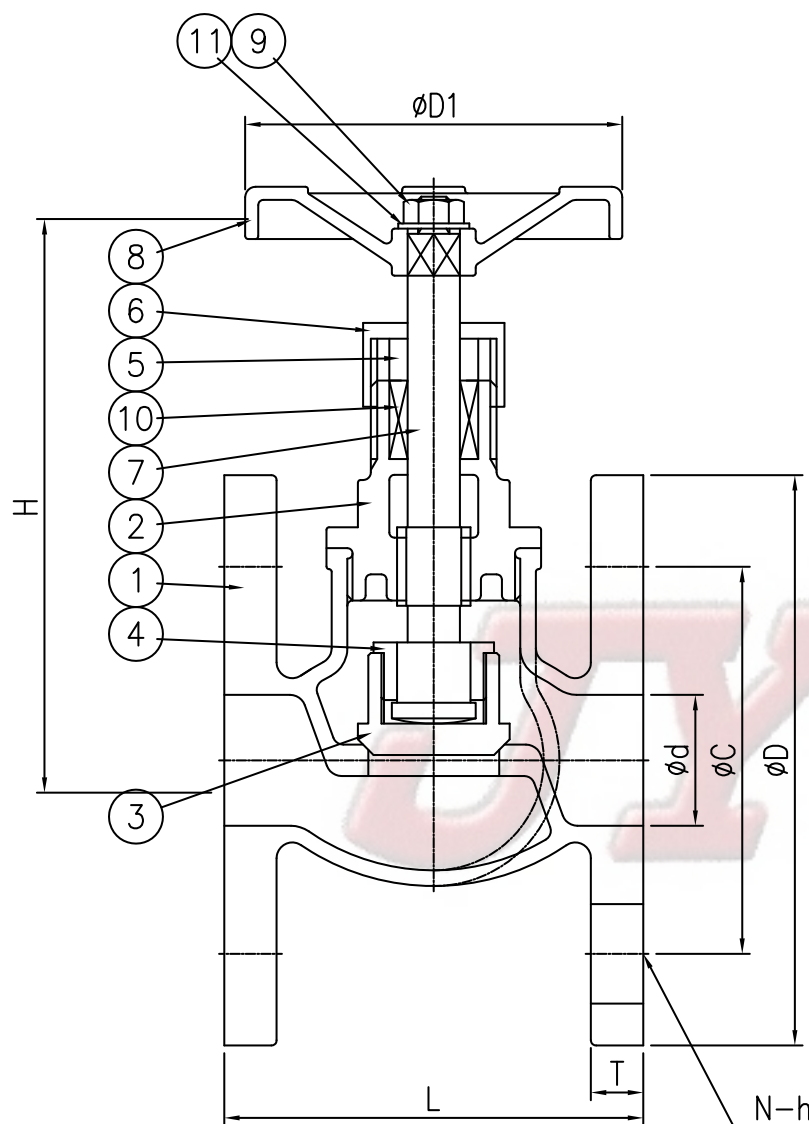

NO.	PARTS	MATERIAL
1	BODY	BRONZE
2	BONNET	BRONZE / BRASS
3	DISC	BRONZE / BRASS
4	DISC NUT	BRASS
5	PACKING GLAND	BRASS
6	GLAND NUT	BRASS
7	STEM	BRASS
8	HANDWHEEL	CAST IRON
9	HANDLE NUT	STAINLESS STEEL
10	PACKING	NON ASBESTOS
11	WASHER	STEEL



Screw Down Non Return (SDNR)

DIMENSIONS(mm)

NB	d	L	D	C	N-h	T	D1	H
15	15	60	80	60	4-12	8	55	76
20	20	70	85	65	4-12	8.5	55	94
25	25	80	95	75	4-12	9.5	67	110
32	32	100	115	90	4-15	10.5	72	122
40	40	100	120	95	4-15	11.5	72	122
50	50	120	130	105	4-15	12	89	147
65	65	140	155	130	4-15	13	99	166
80	80	160	180	145	4-19	14	130	199
100	100	175	200	165	8-19	15	160	250

Test Pressure (Mpa)

Rating	5K
Hydrostatic press test (Shell)	1.03
Hydrostatic press test (Seat)	0.76

Remark : 1. The flanges shall conform to nominal pressure 5K and 10K.


✖ It's prohibited to copy or transcribe arbitrarily.



Cast Bronze JIS Industrial Valves

■ JIS 5K Industrial Gate Valves Non Rising Stem (Screw Bonnet)

JYV fig123

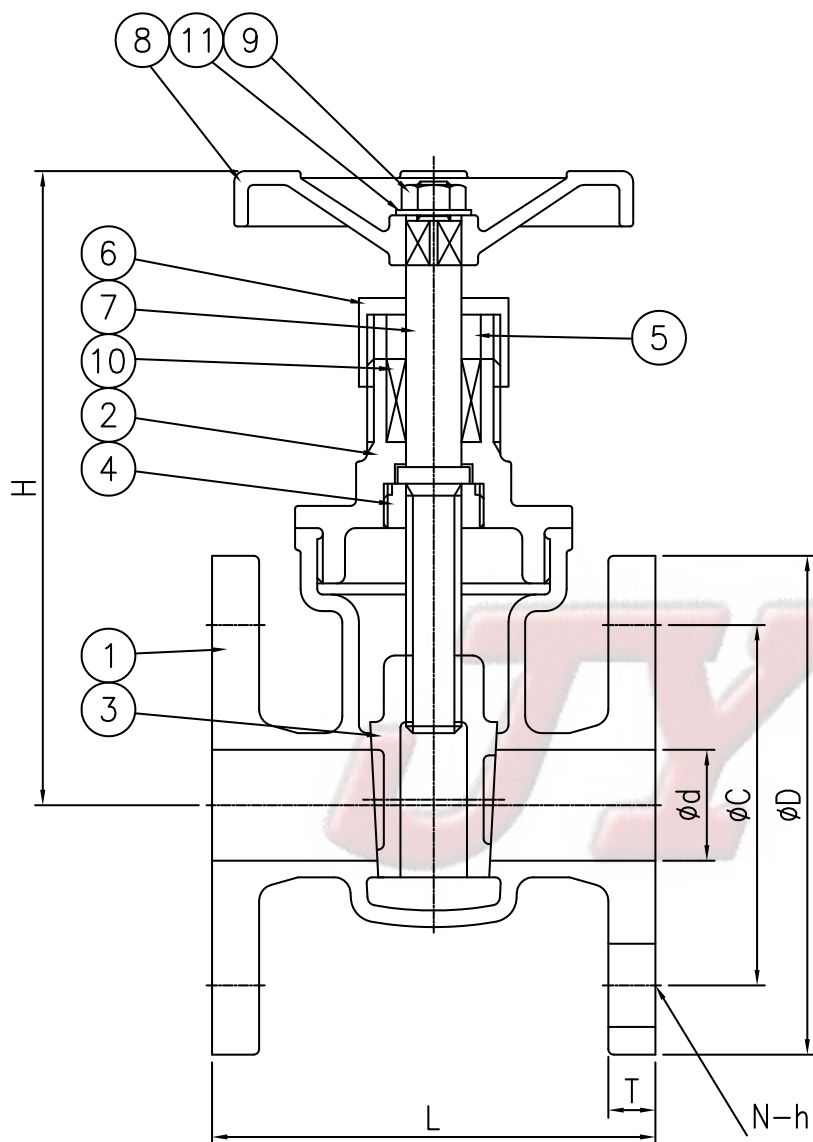

NO.	PARTS	MATERIAL
1	BODY	BRONZE
2	BONNET	BRONZE
3	DISC	BRONZE
4	RING	BRASS
5	PACKING GLAND	BRASS
6	GLAND NUT	BRASS
7	STEM	BRASS
8	HANDWHEEL	CAST IRON
9	HANDLE NUT	STEEL
10	PACKING	NON ASBESTOS
11	WASHER	STEEL

DIMENSIONS(mm)

NB	d	L	D	C	N-h	T	D1	H
20	20	80	85	65	4-12	8.5	56	113
25	25	80	95	75	4-12	9.5	67	120
32	32	100	115	90	4-12	10.5	72	135
40	40	100	120	95	4-15	11.5	72	146
50	50	115	130	105	4-15	12	89	179
65	65	128	155	130	4-15	13	99	210
80	80	142	180	145	4-19	14	99	242
100	100	165	200	165	8-19	15	130	284

Test Pressure (Mpa)

Rating	5K
Hydrostatic press test (Shell)	1.03
Hydrostatic press test (Seat)	0.76

Remark : 1. The flanges shall conform to nominal pressure 5K and 10K.

✖ It's prohibited to copy or transcribe arbitrarily.


Cast Bronze JIS Marine Valves

■ JIS 10K Globe Valves

JIS B2026

■ JIS 10K Globe Screw-Down Check Valves

JIS B2026

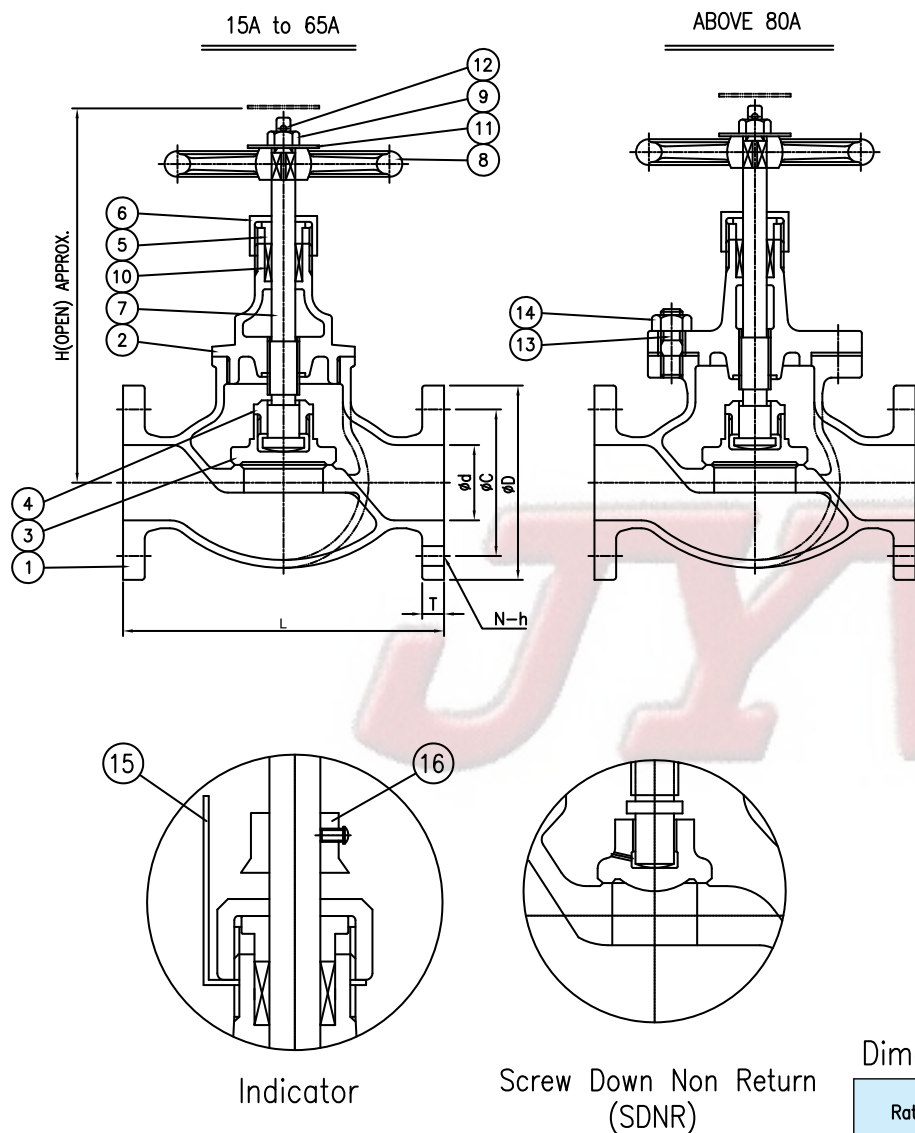

NO.	PARTS	MATERIAL
1	BODY	BRONZE /JIS H5120 CAC406
2	BONNET	BRONZE / BRASS
3	DISC	BRONZE / BRASS
4	DISC NUT	BRONZE / BRASS
5	PACKING GLAND	BRONZE / BRASS
6	GLAND NUT	BRONZE / BRASS
7	STEM	BRASS
8	HANDWHEEL	CAST IRON
9	HANDLE NUT	STAINLESS STEEL
10	PACKING	NON ASBESTOS
11	WASHER	STAINLESS STEEL
12	SPLIT PIN	BRASS
13	BONNET BOLT	STAINLESS STEEL
14	BONNET NUT	STAINLESS STEEL
15	INDICATOR PLATE	BRASS PLATE
16	INDICATOR	BRASS

Dimension Table (Unit : mm)

Rating	Size	d	L	FLANGE				H
				D	C	N-h	T	
JIS 10K (JIS B2026)	15A	15	85	95	70	4-15	12	110
	20A	20	95	100	75	4-15	14	125
	25A	25	110	125	90	4-19	14	140
	32A	32	130	135	100	4-19	16	170
	40A	40	150	140	105	4-19	16	180
	50A	50	180	155	120	4-19	16	205
	65A	65	210	175	140	4-19	18	240
	80A	80	240	185	150	8-19	20	275
	100A	100	280	210	175	8-19	22	345

Test Pressure (MPa)

Rating	JIS 10K
Hydrostatic press test (Shell)	2.1
Hydrostatic press test (Seat)	1.54

Remark : 1. The flanges shall conform to nominal pressure 5K and 10K.

✖ It's prohibited to copy or transcribe arbitrarily.




Cast Bronze JIS Marine Valves

■ JIS 10K Angle Valves


JIS B2027

■ JIS 10K Angle Screw-Down Check Valves


JIS B2027

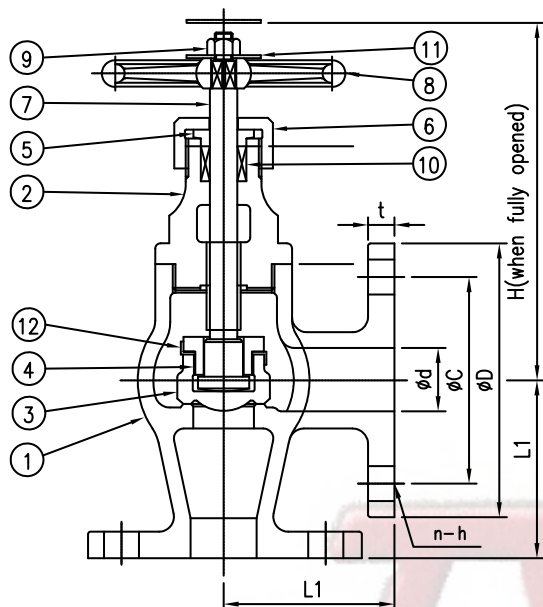

NO.	PARTS	MATERIAL
1	BODY	BRONZE / JIS H5120 CAC406
2	BONNET	BRONZE / BRASS
3	DISC	BRONZE / BRASS
4	DISC NUT	BRONZE / BRASS
5	PACKING GLAND	BRONZE / BRASS
6	GLAND NUT	BRONZE / BRASS
7	STEM	BRASS
8	HANDWHEEL	CAST IRON
9	HANDLE NUT	STAINLESS STEEL
10	PACKING	NON ASBESTOS
11	WASHER	STAINLESS STEEL
12	DISC STOPPER	BRASS
13	INDICATOR PLATE	BRASS PLATE
14	INDICATOR	BRASS

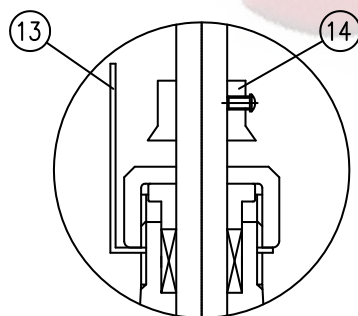

Indicator



Screw Down Non Return
(SDNR)

Dimension Table (Unit : mm)

Rating	Size	d	L1	FLANGE				H
				D	C	N-h	T	
JIS 10K (JIS B2026)	15A	15	62	95	70	4-15	12	110
	20A	20	65	100	75	4-15	14	125
	25A	25	80	125	90	4-19	14	140
	32A	32	85	135	100	4-19	16	170
	40A	40	90	140	105	4-19	16	180
	50A	50	100	155	120	4-19	16	205
	65A	65	110	175	140	4-19	18	240

Test Pressure (MPa)

Rating	JIS 10K
Hydrostatic press test (Shell)	2.1
Hydrostatic press test (Seat)	1.54

Remark : 1. The flanges shall conform to nominal pressure 5K and 10K.

✖ It's prohibited to copy or transcribe arbitrarily.